

Windshield Holder, with Suction Pads



INTENDED USE

This product is used to put down car and van windows when applying window adhesive, installing the window seal, cleaning the window before installation, etc. and is suitable for windshields, rear windows. When putting down a window, make sure that the window rests on all four rubber plates. The maximum load capacity is 70 kg. Any other use and change is contrary to the intended use and, is not permitted.

SAFETY INFORMATIONS

- Use the product only for its intended purpose.
- Do not use the product as a ladder, climbing frame or anchor point.
- Keep children and other unauthorized persons away from the work area.
- Do not let children play with the product or its packaging.
- Always wear appropriate protective equipment and clothing when using this product, e.g. Safety glasses, safety shoes, protective gloves, this applies to the user and helper.
- When installing and removing windows, always use rubber suction cups / window carriers.
- Always be careful when handling windows, windows made of laminated safety glass are particularly sensitive to tension.
- Always observe the vehicle manufacturer's safety and assembly instructions.
- Ask a second person to help you assemble the window and move it. When assembling and transporting the window without a second person, there is a risk of injury and window assembly is more difficult.
- Make sure the work area is clean, tidy, well-lit, dry and appropriately equipped.
- Keep this product in a dry place out of the reach of children.


MOUNTING

- When assembling the product, do not reach through joints or moveable connections, there is a risk of entrapment.
- Keep children and other unauthorized persons away from the assembly area.
- Wear non-slip safety shoes and protective gloves when assembling the product; this applies to both the person who mounting and the helper.

PARTS


No.	Description	Qty.	Sketch
1	Frame top tube with chain	1	
2	Rubber plate	4	
3	Chain with eye bolt	2	
4	Hook with Eylet	2	
5	Hex nut M8	8	
6	Leg tube	4	
7	Frame top tube	1	
8	Bolt M8 x 65 mm	2	
9	Washer Ø 8 x 30 mm	2	
10	Lock nut M8	2	
11	Washer Ø 8 x 16 mm	12	

CHAIN MOUNTING

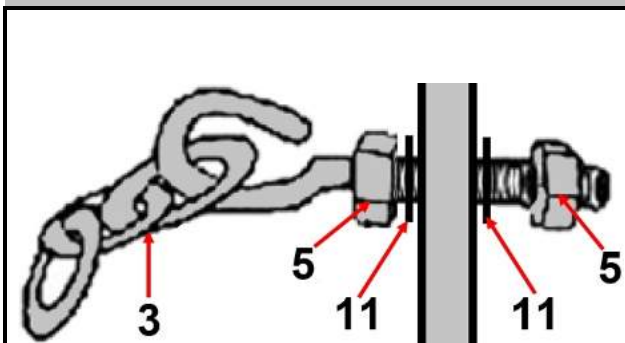

Screw the nut (5) onto the eye bolt of the chain (3), and push the washer (11) onto the eye bolt.
Now push the bolt through the frame hole, and secure it with the washer (11) and nut (5).

FRAME MOUNTING

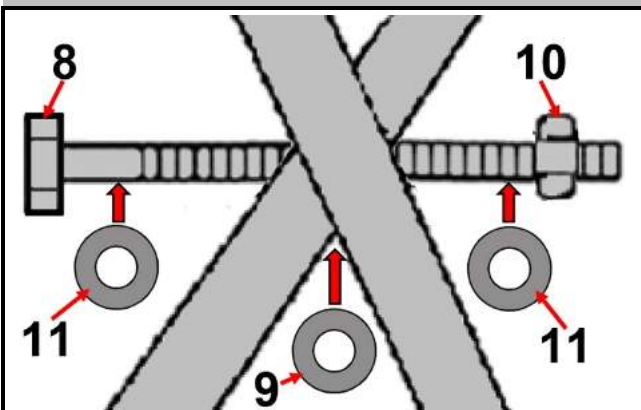

Select the hexagon screw (8) and slide the washer (11) onto the screw.
Insert the screw in the middle hole of one frame and place the washer (9) on the protruding screw part. Insert the screw into the hole in the second frame and secure it with the washer (11) and lock nut (10).